


Colors available for panels and corners



Actual colors may differ from those shown due to the printing process. **NOVIK**® reserves the right to add or remove certain colors without notice. Check store samples.
 Visit our website to consult the color chart.
http://www.novik.com/professionnels/polymer-products_DOCUMENTATION

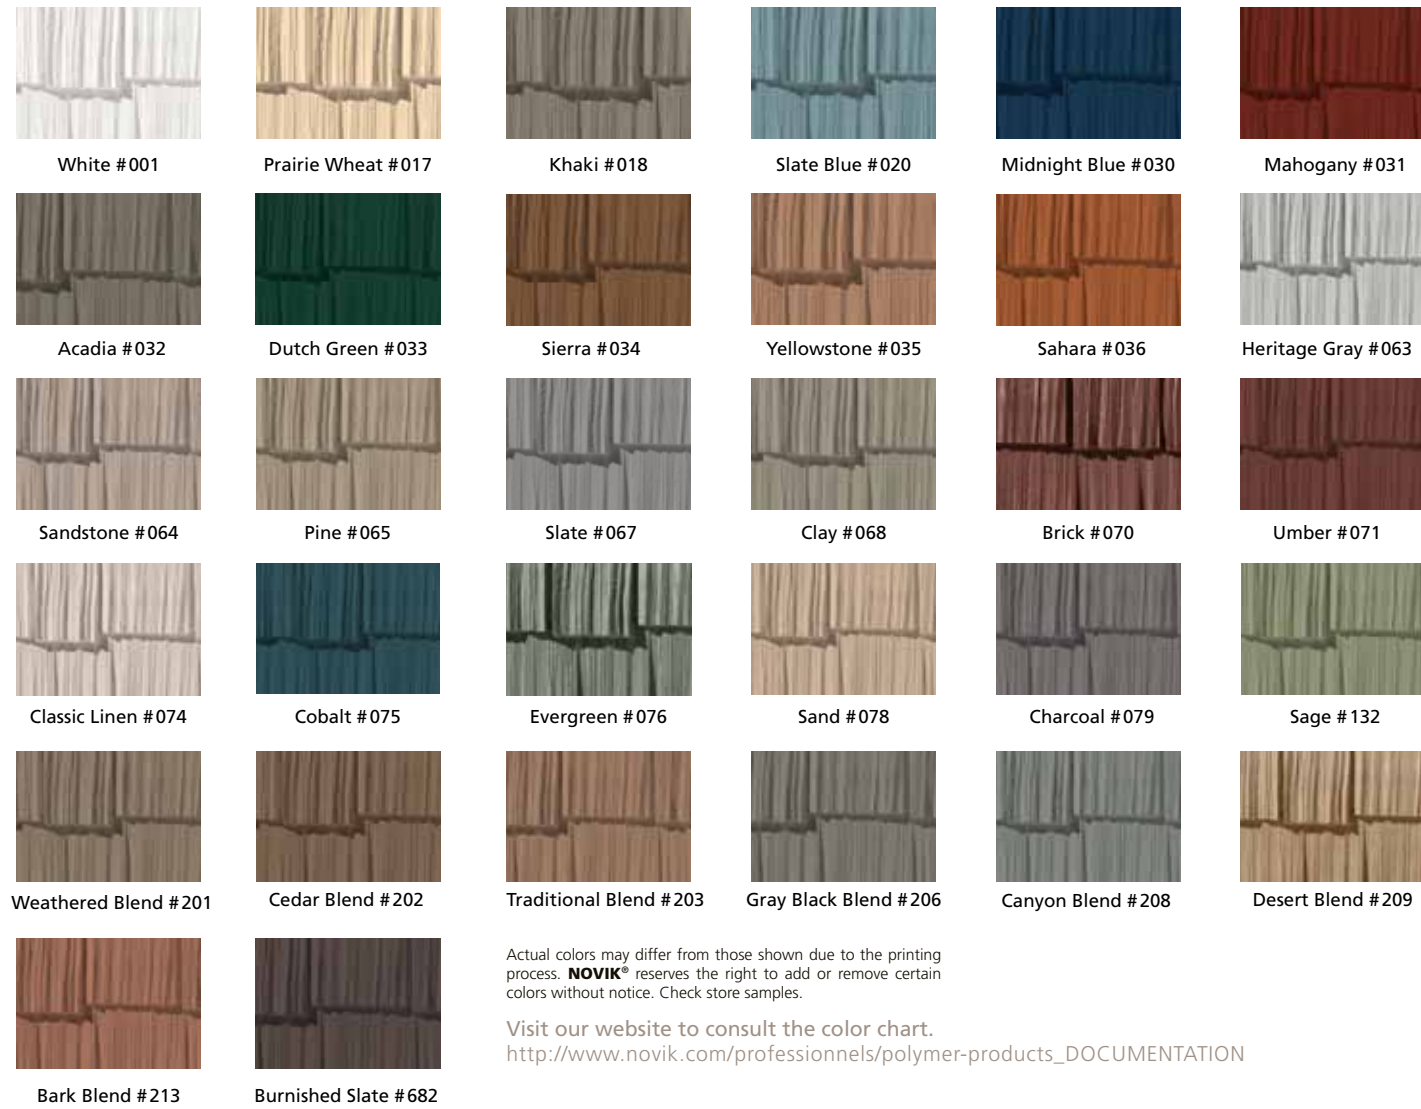

NOVISHAKE™ HS
 Unique and Distinctive design

Hand-Split Shake Panel
 POLYMER SIDING SYSTEM



Other innovative products from NOVIK®... For endless combinations



Phone: 418 878-6161 Toll-free: 888 847-8057
info@novik.com / www.novik.com



NOVISHAKE™HS - Hand-Split Shake is an exclusive polymer panel, ideal for accent and structures looking for a traditional look.


NOVISHAKE™HS
Unique and Distinctive design

Hand-Split Shake Panel
POLYMER SIDING SYSTEM


Enhanced performance features

FAST-FIT

What is **FAST-FIT**?
Features that simplify installation.



"Nail locators" facilitate the installation by precisely showing nail position.



The center-panel nailing hole helps spread the panel's expansion and retraction evenly.



Special temperature line molded to ensure precise installation.



Superior interlocking system designed and tested to withstand hurricane windload.

Panels are held securely in place with extra long lock tabs that engage easily for faster and easier installation.

Product shown: **NOVISHAKE™HS** - Hand-Split Shake, Traditional Blend #203.
Overall dimensions: 48.5" X 19" (123,2 cm x 48,3 cm)
9 panels per box: approx. 50 square feet (4,65 m²) / 5.55 pi² (0,51 m²) per panel



Larger tabs on the back of the panel to facilitate insertion

Back of panel



Pronounced wood-grain



"Hammer-Stopper system" limits nail penetration to ensure smooth panel expansion and retraction.



Overall dimensions: 4.7" X 19.3"
(11,9 cm x 49 cm).
Corners are available in all **NOVISHAKE™HS** colors.



You can now recreate the old rustic charm of hand crafted traditional homes with the **NOVISHAKE™HS** Hand-Split Shake siding system.

Unlike real hand-split shakes that require expensive and time consuming maintenance, the **NOVISHAKE™HS** - Hand-Split Shake siding system will not rot, split, shrink, absorb water or be destroyed by insects and will maintain its original look for years to come.

Product Highlights

- Extreme temperature variation resistance.
- Resistance to warping, expansion, retraction and cracking.
- Wind and impact (ASTM D4226) resistance.
- Resistance to water, humidity and rot.
- Resistance to discoloration (U.V. rays).
- Fire rating (Class C) certified.
- Lightweight material, fast and easy to install.
- Maintenance free.
- Never needs to be painted.
- Authentic deep wood-grain texture.
- Harmonizes with all siding types.
- Features that simplify installation. **FAST-FIT**
- Certified testing by independent laboratories.



Tests		
Test	Standard testing	Result for NOVISHAKE™HS
Fire rating	In accordance with ASTM E84	Class C fire resistance
Impact	In accordance with ASTM D4226	>35 in-lbf
Accelerated UV exposure	In accordance with ASTM G154/G155/D1435	Virtually no fading
Wind	In accordance with ASTM E72/D5206	Surpassed dade County requirements of 160 mi/h (258 km/h)

*All testing in accordance with ICC-ES AC07 (Acceptance criteria for polymer siding systems) Product certified by independent laboratories.



Product shown: **NOVISHAKE™HS** Canyon Blend #208



Truly maintenance free.
Never needs to be painted.